

Frame screw anchor HUS



Base materials

- Concrete (aerated)
- Concrete (cracked)
- Concrete (uncracked)
- Masonry (hollow)
- Masonry (solid)

Applications

- Fastening window and door frames

Advantages

- Can be driven directly into the base material
- Minimal expansion forces
- Reduced edge and spacing distances


Technical data

Material composition	Steel, zinc-plated (min. 5 µm)
Head configuration	Flat head

Approvals

Fire resistance | MPA/IBMB for HUS

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

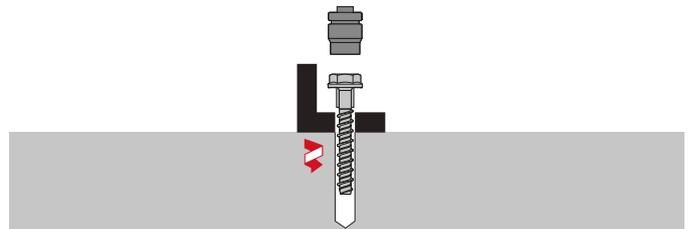

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor size	Anchor length	Base plate clearance hole	Sales pack quantity	Item number
HUS 6x35	6 mm	6	35 mm	9 mm	100 pc	383047 ¹⁾
HUS 6x60	6 mm	6	60 mm	9 mm	100 pc	383049 ¹⁾
HUS 6x100	6 mm	6	100 mm	9 mm	100 pc	381402 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.